

Fire Safe

by Eversafe Extinguisher SDN. BHD.



MONSHER

(INDIA) SAFETY EQUIPMENTS PVT. LTD.
We perform. You deliver.



When it's safety from fire that you need,
there's one name that always delivers.

Across the nation, Monsher India Safety Equipments is the first name people turn to for fire safety solutions. And we partner with some of the world's most trusted names to bring you the best products. Like FireSafe by Eversafe, Malaysia's leading manufacturer of Hose Reels and Hose Reel accessories.

HOSE INLET

Technical Data

Ordering Code	EH25-SHM-09BR	EH25-SHL-12BR	EH19-SHM-09BR
Disc Dia	565	650	565
Inlet Hose Connection	25 x 1.0m	25 x 1.5m	25 x 1.0m
Hose	25 x 30m	25 x 30m	19 x 30m
Swing dim. A x B x C	575 x 565 x 190	635 x 650 x 160	550 x 565 x 160
Close dim. A' x B x C	290 x 565 x 190	295 x 650 x 160	270 x 565 x 160
Recess dim. L x W x D	700 x 700 x 290	760 x 760 x 250	700 x 700 x 250
Working/Test Pressure	12 bar / 18 bar	12 bar / 18 bar	12 bar / 18 bar
Miniumum Flow Rate	34 L/ min	34 L/ min	28 L/ min
Drum Finishing	Red (RAL 3000) Epoxy Polyester Electrostatic Powder Coating		
Design & Manufacture to	BS EN 671-1-2001		

* Note: All dimensions in millimetre unless otherwise specified

Brass Jet/Spray Nozzle also available upon request




25mm AIR RELEASE VALVE

Model:	HV 009
Body Mat.	Copper Alloy
Hydr. Tested	28 Bar
Working Pressure	10 Bar




FIRE HOSE GUIDE

Model:	HRG-01	HRG-02
Body Material	Steel, Nylon Roller	Steel, Plastic Roller
Type	Mounting at Inlet Pipe	Wall Mounted
Finishing	Zinc Chromed, Black Roller	Red

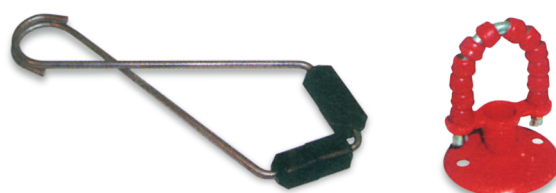


NOZZLE BOX

Model:	HR 511
Body Mat.	Aluminium Alloy
Type	Wall Mounted
Glass	Clear Glass
Finishing	Red




STOP VALVE

Model:	SV-01
Body Material	Forged Brass
Type	25mm Stop Valve with Nozzle Interlock
Finishing	Plain
Working/Test Pressure	12 Bar/20 Bar

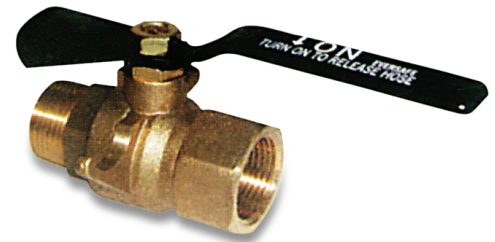


WALL BRACKET for Fixed Hose Reel

Model:	HRB-01
Body Material	Steel
Type	Wall Mounted
Finishing	Galvanised



TWIST OPERATED HR JET/SPRAY NOZZLE

Model	EZ-25P, EZ-19P	EZ-15, EZ-19
Body Mat.	Nylon	Brass
Inlet	19mm, 25mm	
Finishing	Red	Chromed Plated
Test Pressure	18 Bar	
Max. Working Pre	12 Bar	
Flow Rate (6 Bar)	Jet: 55L/min & Spray: 63L/min	
Throw Range (4 Bar)	Jet: 10m & Spray: 4m	

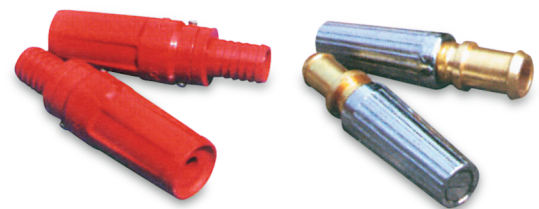

FIRE HOSE REEL (Black/Red)

Features

- The 2-ply polyester yarn “Braided Construction” delivers high working and bursting Pressures.
- Light in weight and very durable.
- Minimum bending radius is only 4-5 times the internal diameter.



Size	Inner Dia. (I.D.) (mm)	Outer Dia. (O.D.) (mm)	Standard Length (m) (at 20°C)	Working Pressure (kgf/cm ²) (at 20°C)	Burst Pressure (kgf/cm ²)		Reference Weight (g/m)
					20°C	60°C	
Ø 1/2" (Black)	13±0.3	19.0±0.3	50	16.5	50	33	202
* Ø 19 mm (Black)	19±0.5	26.2±0.5	30	15	>48		342
Ø 25 mm (Black)	25±0.5	32.6±0.5	30	15	>48		433
** Ø 25 mm (Red-prEN 694)	25±0.5	32.6±0.5	30	12	>42		434
Ø 25 mm (Black-prEN 694)	25±0.5	32.6±0.5	30	12	>42		434
Ø 38 mm (Red)	38±0.7	48.0±0.7	30	7	>24.5		940

